

CPT tm conveyor with metal belt

TECHNICAL DATA SHEET


DRIVE UNIT

- Position: pendular on the LH side
- Gear motor power: 0.25 kW
- Conveyor speed: 4 m/min fixed
- Control: Siemens Start and Stop switch/motor cut-out
- Connection Voltage: 400 Volts/50 Hz
- Connection plug: 4P (3 phases+ground)

METAL BELT

- Standard slats h=30 mm, pitch=400 mm
- Belt width: 250 to 550 mm (pitch 100 mm)

- | | |
|--|-----------------------------------|
| <input type="checkbox"/> Smooth | <input type="checkbox"/> Embossed |
| <input type="checkbox"/> Embossed and perforated | <input type="checkbox"/> Mesh |

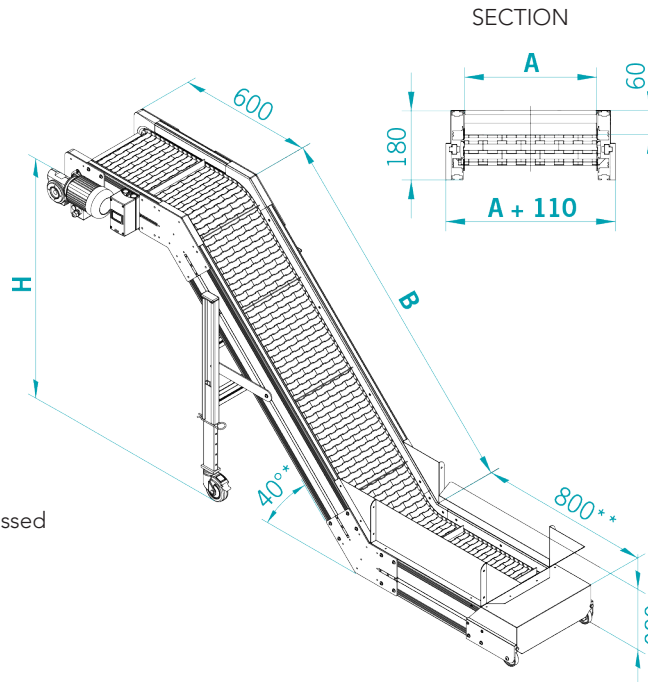

A (mm)	<input type="checkbox"/> 250	<input type="checkbox"/> 350
	<input type="checkbox"/> 450	<input type="checkbox"/> 550
B (mm)		
H (mm)		
Capacity (Kg)		
Material to be conveyed		
Specify presence of lubricant, coolant or other fluid, if present.		

* inclination variable as per request (30° - 35° - 45°)
 ** size variable on request

OPTIONAL

DRIVE UNIT

- Mounted on opposite side: RH side

MB TOP CONTROL 400 Volt/3/50 Hz


- Mod. NEW TOP CONTROL complete with programs and with three-phase Inverter

STANDARD FUNCTIONS

- Adjustable speed from _____ to _____ mt/min.
- Pause/Work for step-by-step advancement
- Robot/Pulse for timed advancement by external command


LOADING HOPPER

- Loading hopper
 L= _____ mm, H= _____ mm, P= _____ mm

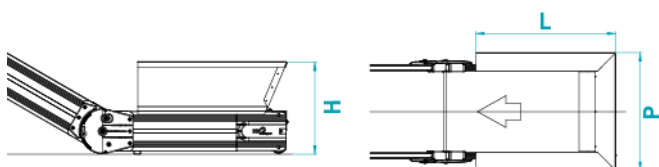

UNLOADING CHUTE

- Standard unloading chute

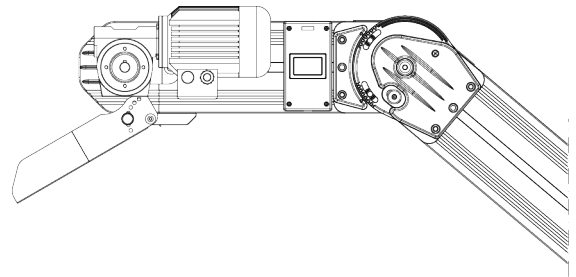

NOTES