





Dimensions

A (mm)	275	375
	475	575
B (mm)		
H (mm)		
l (mm)		
Capacity (kg)		

Material to be conveyed

Specify presence of lubricant, coolant or other fluid, if present.

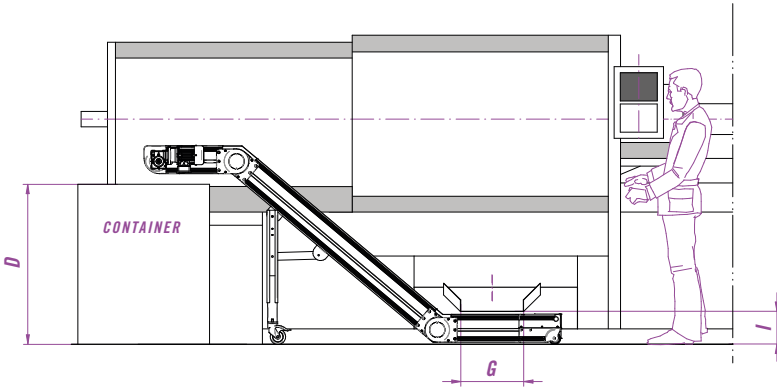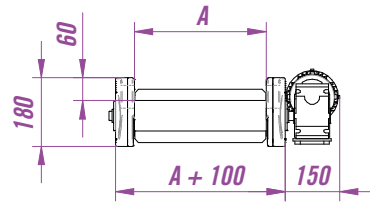

Notes



Standard features

DRIVE UNIT

- Position: LH side
- Speed: 6,5 m/min fixed
- Voltage: 400 V / 50 Hz
- With ON/OFF switch

BELT

- Plastic belt in glass-fibre reinforced PA6
- Modular slats h 35 or h 45 mm, pitch 400 mm
- Operating temperature: da +1 °C a +130 °C



Options

DRIVE UNIT

Mounted on opposite side: RH side

SPECIAL PLASTIC BELTS


Perforated plastic belt: for cooling applications
 Plastic belt in dark grey colour

CONTROL PANEL

INVERTER: adjustable speed from to m/min
PAUSE/WORK: timed run and stop
PULSE: timed run activated by voltage-free external signal
FEEDER: run and stop controlled by voltage-free external signal

LOADING HOPPER

Loading hopper L = mm, H = mm, P = mm

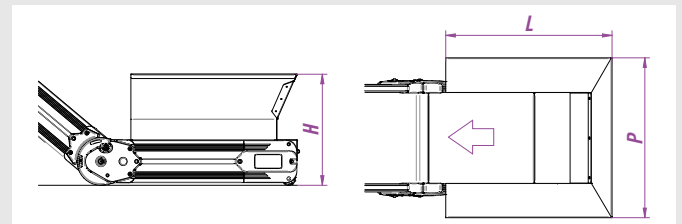

UNLOADING CHUTE / SEPARATOR

- | | | | |
|---------------------------------|---|--|--|
| Standard unloading chute | Single-roller separator mod. N-SRS | Spiral-roller separator mod. N-FSRV | Integrated rotating chute mod. N-DUCK (*) |
|---------------------------------|---|--|--|

