


TS 01

- Ø 120 mm head roller combined with special drive housing with rounded corner and drive unit under belt
- Ideal solution for products with larger dimensions than the working width of the conveyor


PA 110 PAR

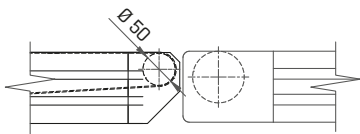

TS 50

- Ø 50 mm head roller
- This solution facilitates transfer from one conveyor to the other of small boxes or plastic/metal containers


PA 110 PAR

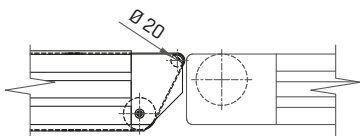

TS 20

- Ø 20 mm head roller
- This solution facilitates transfer of products from one conveyor to the other, including very small ones, guaranteeing their smooth transfer



PA 110 PAR

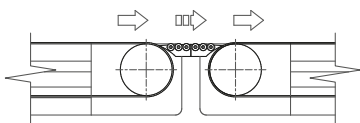

TS 04

- Head roller complete with roller inserts
- This solution allows transfer of products from one conveyor to the other, guaranteeing a flat resting surface

PA 110 PAR T100 PA 180

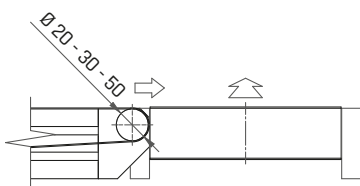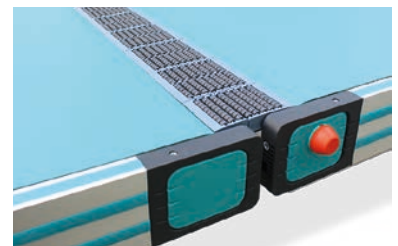

TS PO

- Example of right-angled transfer between two conveyors
- It is important to examine the shape of the product to be conveyed to optimise this solution.

PA 110 T100

